

# AS-7M144-HC

## 550W~575W

### MONOCRYSTALLINE MODULE

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 22.25% by using innovative N-type TOPCon cell technology.
- Extremely low LID (light induced degradation) and low annual power degradation ensure higher energy yield during the module's lifetime.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.

#### CERTIFICATIONS




- IEC 61215, IEC 61730, CE
- ISO 9001:2015: Quality management system
- ISO 14001:2015: Environmental management system
- ISO 45001:2018: Occupational health and safety management system

#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solution**

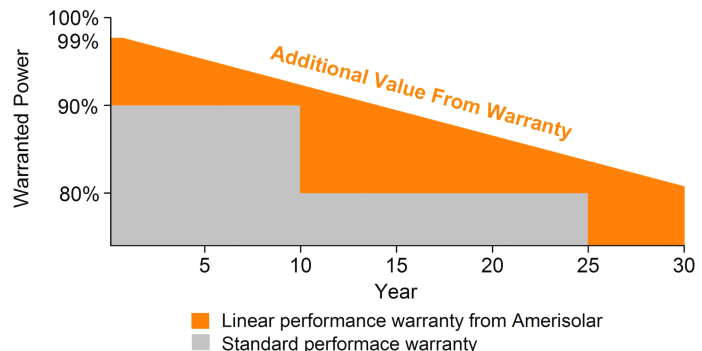

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	550W	555W	560W	565W	570W	575W
Open Circuit Voltage ( $V_{OC}$ )	50.0V	50.2V	50.4V	50.6V	50.8V	51.0V
Short Circuit Current ( $I_{SC}$ )	13.94A	13.99A	14.04A	14.09A	14.14A	14.19A
Voltage at Maximum Power ( $V_{mp}$ )	41.8V	42.0V	42.2V	42.4V	42.6V	42.8V
Current at Maximum Power ( $I_{mp}$ )	13.16A	13.22A	13.28A	13.33A	13.39A	13.44A
Module Efficiency (%)	21.28	21.48	21.67	21.86	22.06	22.25
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1000V DC/1500V DC					
Fire Resistance Rating	Type 1(in accordance with UL1703)/Class C(IEC61730)					
Maximum Series Fuse Rating	25A					

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of Pmax: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	413W	417W	421W	425W	429W	433W
Open Circuit Voltage ( $V_{OC}$ )	47.5V	47.7V	47.9V	48.1V	48.3V	48.5V
Short Circuit Current ( $I_{SC}$ )	11.29A	11.33A	11.37A	11.41A	11.45A	11.49A
Voltage at Maximum Power ( $V_{mp}$ )	39.3V	39.5V	39.7V	39.9V	40.1V	40.3V
Current at Maximum Power ( $I_{mp}$ )	10.51A	10.56A	10.61A	10.66A	10.70A	10.75A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline N-type 182*91mm
Number of cells	144 (6x24)
Module dimensions	2279x1134x35mm (89.72x44.65x1.38inches)
Weight	29kg (63.9lbs)
Front cover	3.2mm (0.13inches) tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> (0.006inches <sup>2</sup> ), Portrait: 300mm (11.81inches); Landscape: 1300mm (51.18inches)
Connector	MC4 or MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	43°C±2°C
Temperature Coefficients of $P_{max}$	-0.30%/°C
Temperature Coefficients of $V_{OC}$	-0.25%/°C
Temperature Coefficients of $I_{SC}$	0.045%/°C


## PACKAGING

Standard packaging	31pcs/pallet
Module quantity per 20' container	155pcs
Module quantity per 40' container	620pcs (HQ)


## ENGINEERING DRAWINGS

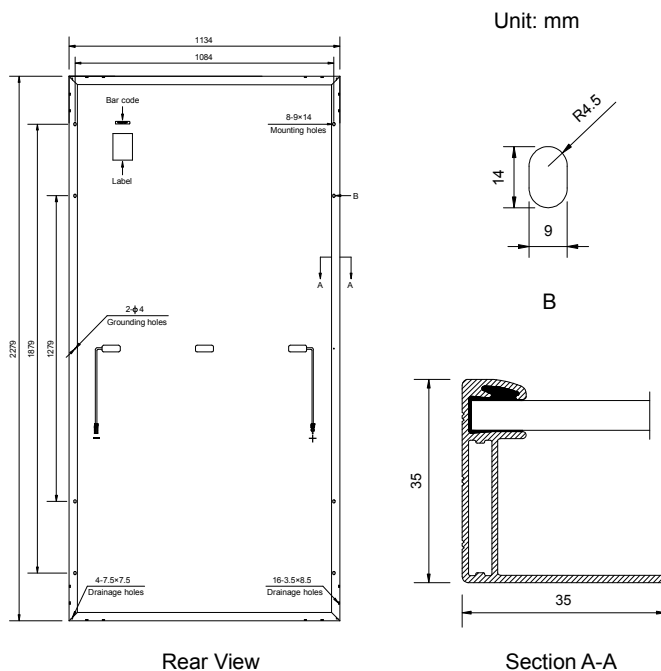

## IV CURVES

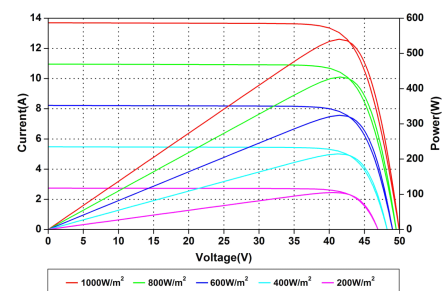

Current-Voltage and Power-Voltage Curves at Different Irradiances

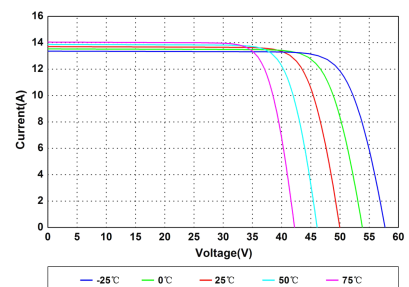

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.